

ELETTROPOMPE SOMMERSE PER ACQUE CARICHE SUBMERSIBLE PUMPS FOR DIRTY WATER

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35° C
- Profondità d'immersione 5 mt.
- Passaggio solidi SVC 400 Ø 20 mm
- Passaggio solidi SVC 900 Ø 25 mm
- Livello min. d'aspirazione SVC 400 50 mm
- Livello min. d'aspirazione SVC 900 50 mm

MOTORE

- Protezione amperometrica a riarmo automatico incorporata
- Condensatore permanente inserito
- Isolamento Classe F
- Protezione IP 68

MATERIALI

- Maniglia Polipropilene
- Corpo pompa Polipropilene
- Girante Noryl
- Cassa motore Acciaio Inox
- Albero motore Acciaio Inox
- Doppio anello di tenuta
- Tenuta meccanica (SVC 900)

OPERATING CONDITIONS


- Liquid temperature up to 35°C
- Submersion depth 5 mt.
- Grain size inlet SVC 400 Ø 20 mm
- Grain size inlet SVC 900 Ø 25 mm
- Min. suction level SVC 400 50 mm
- Min. suction level SVC 900 50 mm

MOTOR

- Built-in overload motor protector with automatic reset
- Permanent split capacitor
- Insulation Class F
- Protection IP 68

MATERIALS

- Handle Moplen
- Pump body Moplen
- Impeller Noryl
- Motor casing Stainless Steel
- Shaft with rotor Stainless Steel
- Double oil seal
- Mechanical seal (SVC 900)

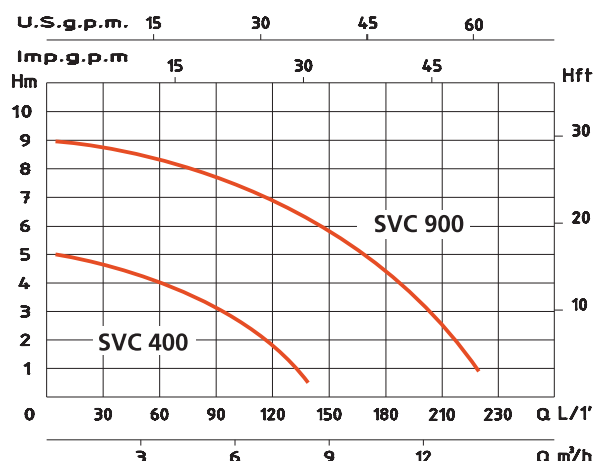

TIPO - TYPE	SVC 400	SVC 900
P1	400 W	900 W
Voltage	230 V	230 V
Frequency	50 Hz	50 Hz
Ampere	2 A	4,5 A
Q max.	140 l/1'	230 l/1'
H max.	5 m	9 m
Dnm	1"1/2	1"1/2